



USB Drivers Install Guide Windows 10

Rev: 1.0
DOCID-M-011-0

CONTENTS

SECTION 1 _____ 03

- OVERVIEW
 - Introduction

SECTION 3 _____ 04 - 8

- STEP-BY-STEP GUIDE

MANUAL REVISION HISTORY

Rev 1	03-29-2022	Original
-------	------------	----------

Overview

INTRODUCTION

This guide is intended to provide clear instruction for installing USB drivers for use with Q5X products under Windows 10 operating system.

Step-By-Step Guide

STEP ONE

Click on the Magnifying glass to the right of the windows icon, at the bottom left corner of the screen.




STEP TWO

Type Device Manger in the search field and click on Device manager in the provided list to launch the window.

STEP THREE


When the Device Manager window opens; at the bottom of the list, find USB Serial Converter. Double click this item.

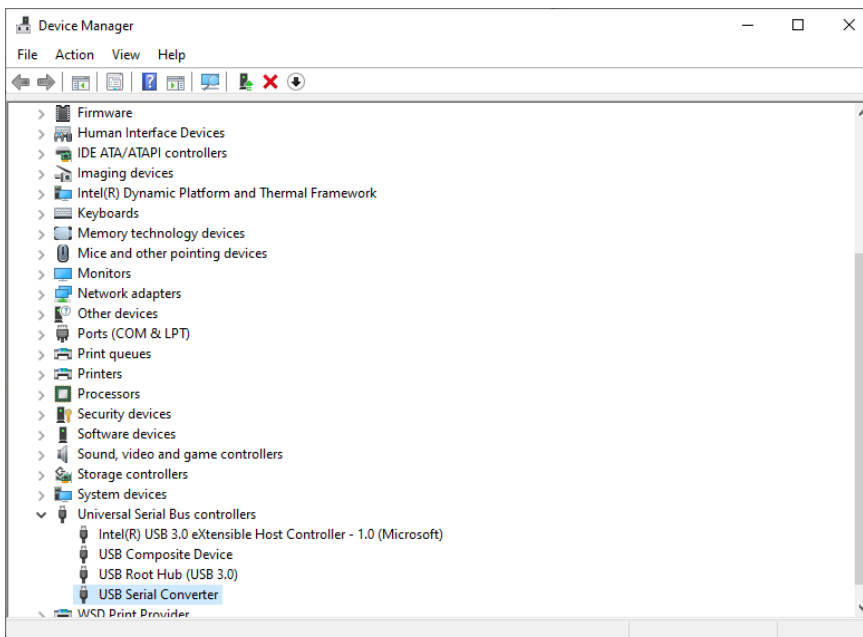

Step-By-Step Guide


STEP FOUR

The properties window will open. Make sure it is for the FTDI. Click update driver.

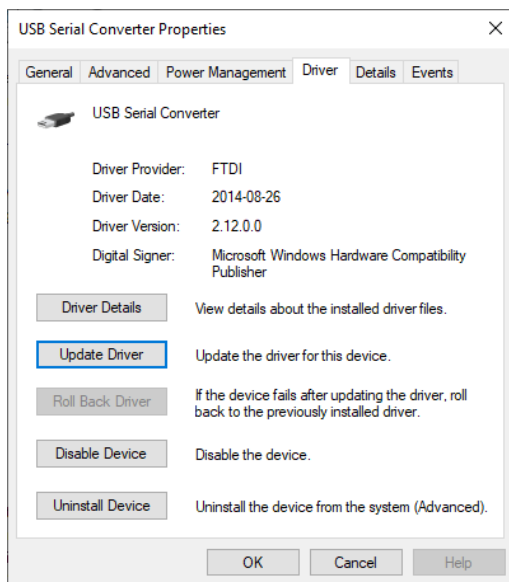

STEP FIVE



Browse to the zip file you downloaded from the website. Make sure include subfolders is checked.

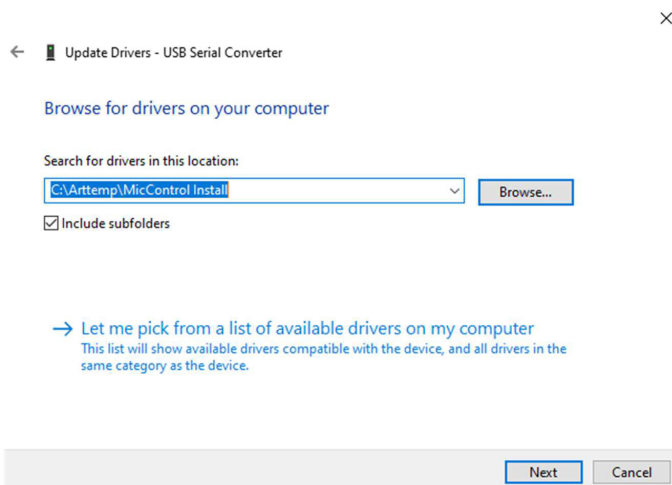

Step-By-Step Guide


STEP SIX

Select USB Drivers folder in the MicControl Install folder. Click OK. Then Click next on the update driver window. Once the Driver is installed then plug in the H2 using the MicroUSB cable. Open the Gateway manager. Select Add gateway. Select USB, click refresh. Select the Gateway and click add.

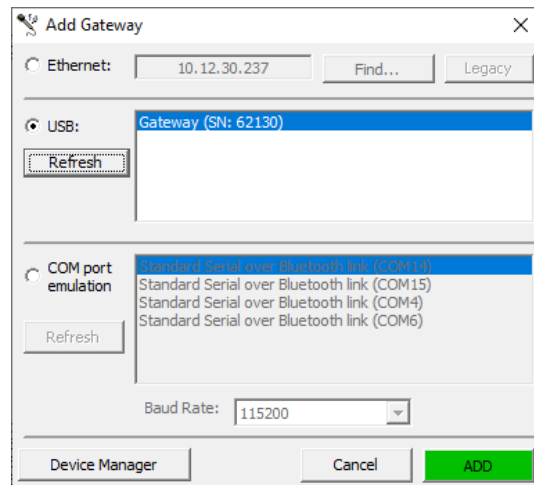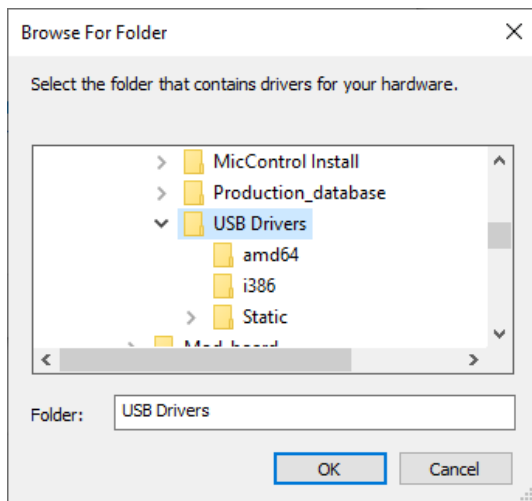

STEP SIX

Click Connect on the main Gateway manger page. Then the software should see the TXs. Make sure that the TX and the Gateway are on the same 2.4 GH channel.

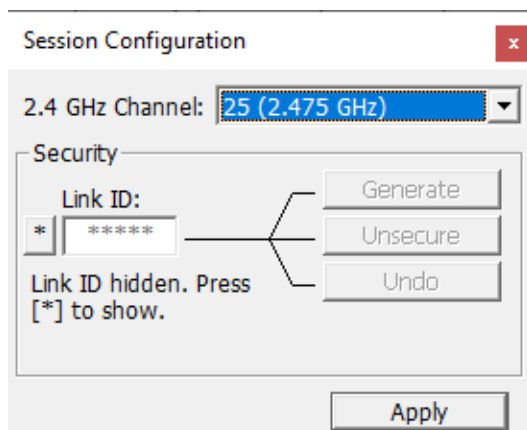

Q5X[®]

Q5X[®]

PHONE: 519 675-6999

TECHNICAL SUPPORT EMAIL: support@q5x.com

SALES ASSOCIATE EMAIL: sales@q5x.com

LOCATION: 30 Adelaide Street North, London ON, Canada N6B 3N5